


# PRODUCT OVERVIEW

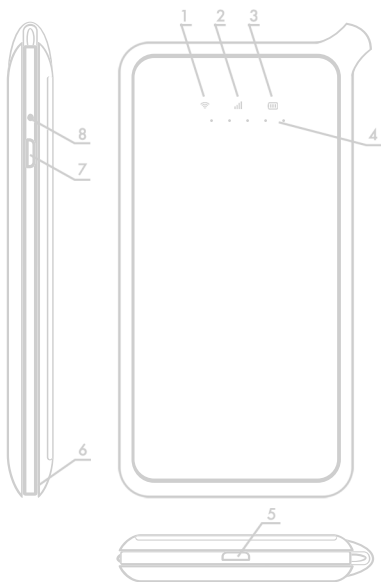

1. Wi-Fi LED Indicator
2. Signal LED Indicator
3. Battery LED Indicator
4. Strength LED Indicator
5. Micro USB (Input)
6. Handle position for opening front panel
7. Power Button
8. Reset Button

# PRODUCT FUNCTIONALITY

1. Power on: Press power button for 3 seconds
2. Power off: Press power button for 5 seconds
3. Reset: Press power button for 18 seconds
4. Restore Factory Settings: Press reset button for 5 seconds.
5. Battery Capacity and Signal Strength: Press the power button, the battery capacity will be shown in the first 3 seconds, then the signal strength will be shown afterwards.

LED Indicator Type	Status	Remarks
Wi-Fi LED Indicator	On Off Flashing	Ready for internet connection No internet connection Service connecting
Signal LED Indicator	On Flashing	The signal strength is shown by strength LED indicator (4) Service Error
Battery LED Indicator	On Flashing	The battery capacity is shown by strength LED indicator (4) LED flashes quickly indicate low battery LED flashed slowly indicate charging

# PRODUCT SPECIFICATIONS

---

LTE FDD: Band 1 / 2 / 3 / 4 / 5 / 7 / 8 / 9 / 17 / 20

LTE TDD: Band 38 / 39 / 40 / 41

WCDMA: Band 1 / 2 / 4 / 5 / 6 / 8 / 9 / 19

GSM: 1900 / 1800 / 900 / 850 MHz

CDMA / EVDO: BCO BCI

---

Max Upload Speed: 50 Mbps

---

Max Download Speed: 150 Mbps

Wi-Fi: IEEE802.11b / g / n

---

Micro USB

---

Battery Capacity: 3500 mAh

---

Power Input: DC 5V = 1 A